

## MVL-KF0618M-12MPE

### 1.1" 6mm 12MP FA LENS


KF-E series FA Lens are optimized for machine vision light sources and sensor, with high resolution, excellent image quality, high transmittance and good stability. Featured with fixed focal length, manual aperture and compact size, it is suitable for machine vision industry applications and ideal for industrial cameras.




### Key Features

- Ultra high resolution and consistency of image clarity
- Lower distortion
- Super high image peripheral brightness ratio
- Excellent optical properties are maintained at different object distances


### MTF

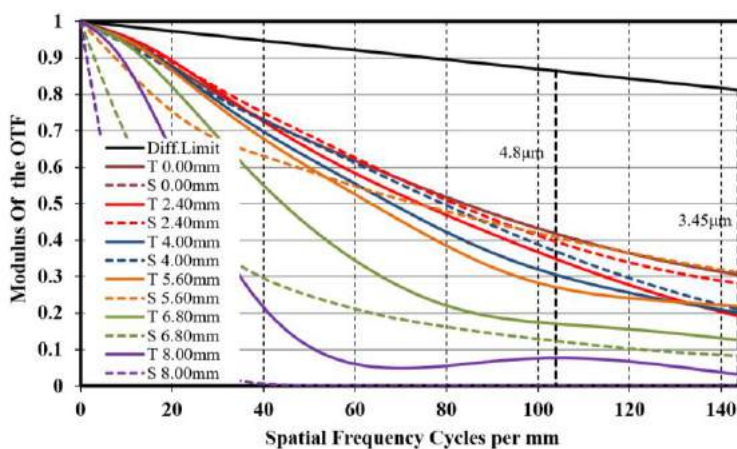

### Distortion

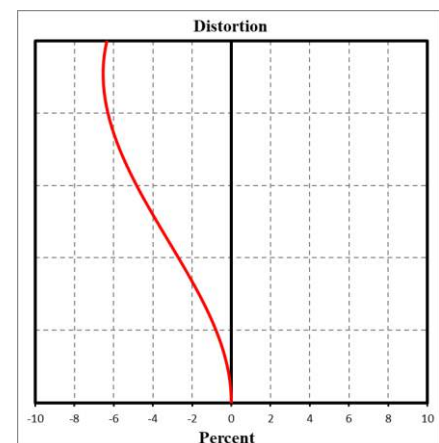

### Relative Illumination

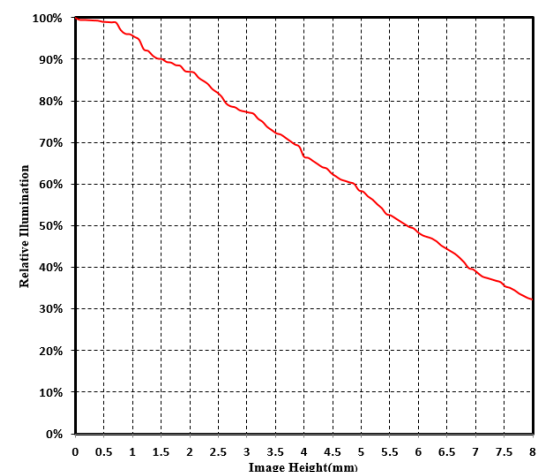


Note: The above curves are the simulate results based on F1.8,  $\beta = -0.012$ , WD=500 mm.



## Specification

| Parameter                  | Model                                                               | MVL-KF0618M-12MPE |
|----------------------------|---------------------------------------------------------------------|-------------------|
|                            | Fixed focal length, Manual iris, 12MP, FA lens                      |                   |
| Performance                |                                                                     |                   |
| Focal Length               | 6 mm                                                                |                   |
| F-Number                   | F1.8 ~ F16                                                          |                   |
| Image Size                 | Φ17.6 mm(1.1'')                                                     |                   |
| Distortion                 | 2.5%                                                                |                   |
| Minimum Operation Distance | 0.1 m                                                               |                   |
| Field of View              | D (17.52mm) : 118.2°<br>H (14.14mm) : 104.9°<br>V (10.35mm) : 86.2° |                   |
| Mechanical                 |                                                                     |                   |
| Iris Control               | Manual                                                              |                   |
| Focus Control              | Manual                                                              |                   |
| Mount                      | C-Mount                                                             |                   |
| Flange Back Length         | 17.526mm                                                            |                   |
| Dimension                  | Φ66×77.8 mm                                                         |                   |
| Weight                     | 353 g                                                               |                   |
| Temperature                | -10 ~ 50℃                                                           |                   |
| General                    |                                                                     |                   |
| Certification              | RoHS2.0                                                             |                   |

## Dimension

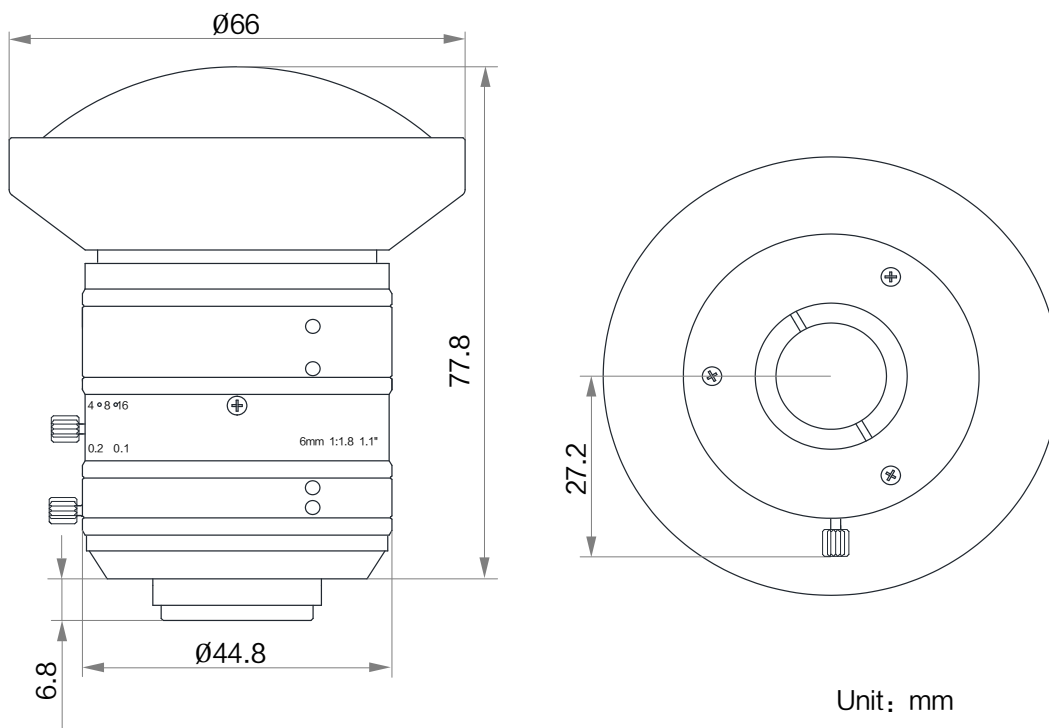

## Field of View

| Extension<br>(mm) | Working<br>Distance(mm) |       | Magnification | Field of View(mm)          |         |                         |         |                          |         |
|-------------------|-------------------------|-------|---------------|----------------------------|---------|-------------------------|---------|--------------------------|---------|
|                   |                         |       |               | 1.1''<br>(14.14mm×10.35mm) |         | 1''<br>(12.45mm×9.83mm) |         | 2/3''<br>(8.45mm×7.07mm) |         |
|                   |                         |       |               | H                          | V       | H                       | V       | H                        | V       |
| 1                 | near                    | 6.27  | -0.224        | 99.00                      | 72.50   | 90.00                   | 68.90   | 62.00                    | 46.50   |
|                   | far                     | 21.56 | -0.142        | 63.00                      | 46.14   | 57.00                   | 43.64   | 40.00                    | 30.00   |
| 0                 | 100                     |       | -0.050        | 291.28                     | 217.54  | 256.47                  | 202.50  | 174.07                   | 145.64  |
|                   | 150                     |       | -0.036        | 407.90                     | 298.61  | 359.20                  | 283.60  | 243.79                   | 203.98  |
|                   | 200                     |       | -0.028        | 525.78                     | 384.86  | 462.94                  | 365.52  | 314.20                   | 262.89  |
|                   | 250                     |       | -0.023        | 641.59                     | 469.62  | 564.91                  | 446.03  | 383.40                   | 320.79  |
|                   | 300                     |       | -0.019        | 766.53                     | 561.07  | 674.92                  | 532.88  | 458.07                   | 383.20  |
|                   | 350                     |       | -0.017        | 877.30                     | 642.19  | 772.50                  | 609.93  | 524.31                   | 438.68  |
|                   | 400                     |       | -0.015        | 997.50                     | 730.10  | 878.32                  | 693.40  | 596.13                   | 498.77  |
|                   | 450                     |       | -0.013        | 1120.00                    | 820.00  | 986.42                  | 778.83  | 669.50                   | 560.16  |
|                   | 500                     |       | -0.012        | 1234.25                    | 903.43  | 1086.73                 | 858.00  | 737.58                   | 617.10  |
|                   | 550                     |       | -0.011        | 1387.80                    | 1015.83 | 1221.90                 | 964.79  | 829.35                   | 693.90  |
|                   | 600                     |       | -0.010        | 1506.37                    | 1102.61 | 1326.30                 | 1047.20 | 900.20                   | 753.18  |
|                   | 650                     |       | -0.009        | 1629.10                    | 1192.50 | 1434.45                 | 1132.58 | 973.58                   | 814.58  |
|                   | 700                     |       | -0.009        | 1748.93                    | 1280.16 | 1539.91                 | 1215.84 | 1045.10                  | 874.46  |
|                   | 800                     |       | -0.008        | 1990.49                    | 1456.90 | 1752.59                 | 1383.77 | 1189.51                  | 995.25  |
|                   | 900                     |       | -0.007        | 2230.42                    | 1632.59 | 1963.84                 | 1550.57 | 1332.89                  | 1115.21 |
|                   | 1000                    |       | -0.006        | 2473.33                    | 1810.40 | 2177.70                 | 1719.40 | 1478.10                  | 1236.70 |

# HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.  
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.  
en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.