

MV-CH1510-11XM-M72-TF

151 MP CMOS CoaXPress Area Scan Camera



GEN*i*CAM

CoaXPress®

Introduction

MV-CH1510-11XM-M72-TF camera adopts Sony® IMX411 sensor to provide high-quality image. It uses CoaXPress interface to transmit non-compressed images in real time with max. frame rate reaching 6.2 fps in full resolution.

Key Feature

- Resolution of 14208 × 10640, and pixel size of 3.76 μm × 3.76 μm.
- Adopts rolling shutter CMOS to provide high dynamic range, SNR, and high-quality image.
- Adopts CoaXPress interface to transmit data.
- Supports Off, Once, Continuous exposure mode, global reset.
- Adopts TEC to keep the camera's sensor temperature around environment temperature.
- Compatible with CoaXPress Protocol, GenICam Standard, and third-party software based on the protocol and standard.


Available Model

MV-CH1510-11XM-M72-TF


Applicable Industry

PCB AOI, FPD, high-accuracy measurement, etc.

Sensor Quantum Efficiency

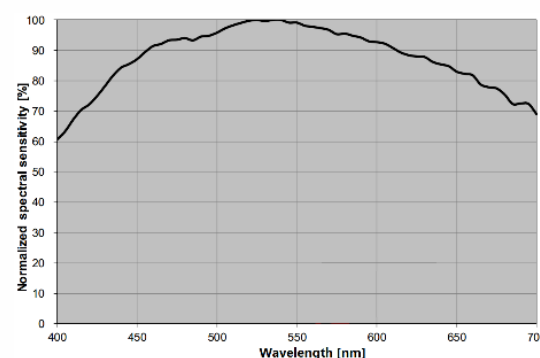

Dimension

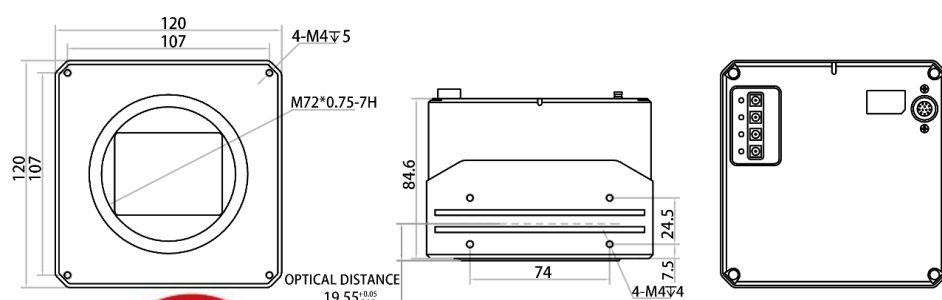

Specification

Model	MV-CH1510-11XM-M72-TF
Camera	
Sensor type	CMOS, rolling shutter
Sensor model	Sony® IMX411
Pixel size	3.76 μm × 3.76 μm
Sensor size	66.7 mm
Resolution	14208 × 10640
Max. frame rate	6.2 fps @14208 × 10640
Dynamic range	78.7 dB
SNR	45 dB
Gain	0 dB to 30 dB
Exposure time	15 μs to 10 sec
Exposure mode	Off/Once/Continuous exposure mode
Sensor shutter mode	Supports Global Reset and Rolling
Mono/color	Mono
Pixel format	Mono 8 /10/12/16
Binning	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4
Decimation	Not support
Reverse image	Supports horizontal reverse image output
Electrical features	
Data interface	CoaXPress with DIN interface
Digital I/O	12-pin Hirose connector provides I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2), and RS-232 × 1.
Power supply	24 VDC
Power consumption	Typ. 21 W@24 VDC (non-TEC cooling mode) Typ. 55 W@24 VDC (TEC cooling mode)
Mechanical	
Lens mount	M72-Mount, optical back focal length 19.55 mm (0.8")
Dimension	120 mm × 120 mm × 84.6 mm (4.7" × 4.7" × 3.3")
Weight	Approx. 1.9 kg (4.2 lb.)
Ingress protection	IP40 (under proper lens installation and wiring)
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)
Humidity	20% to 95% RH, non-condensing
General	
Client software	Frame grabber software meeting with CoaXPress Protocol
Operating system	32/64-bit Windows 7/10 with 8 GB memory or above
Compatibility	CoaXPress, GenICam
Certifications	CE, FCC, RoHS, KC

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.